

KR1001/KT1001

RF REMOTE CONTROLLER


FEATURES

- 1km Communication Range
- Sub-1GHz Transceiver
- Secure Protocol
- Battery Operated

DESCRIPTION

Secure RF transceiver with remote control capability for military applications.

BLOCK DIAGRAM

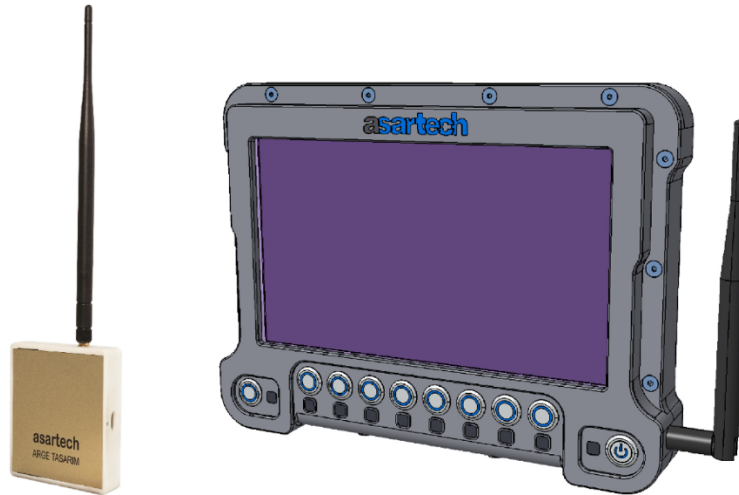

SPECIFICATIONS

Parameter	Limit	Notes
Frequency	Sub 1GHz	Data available upon request
Output Power	+20dBm	
Range	> 1km	
Frequency Accuracy	±1 ppm	
Supply Voltage	Battery operated	
Operation Temperature	-40 to 85C	
Frequency	Sub 1GHz	

Designed and Manufactured in TURKEY

IMPORTANT

- Specifications subject to change without further notice.
- Data given in this document provides its typical performance. Actual device performance is guaranteed by specifications called out by "customer-specific" part number and the associated acceptance test procedure.